

UC C400 PW TR U BK 24 1U V1


19" 1U 24P UTP Punchdown Panel, RJ45, Cat.6,180°

Specification

Item	Description
Panel	Al-Mg alloy, T= 2.5mm, Anodized
Front Cover	ABS+PC, UL94V0
RJ45 Housing	PBT + 15% GF 94V0
Contacts and IDC	Phosphor bronze
Contact Surface Finish	50u" gold plated over contact area
IDC Surface Finish	Tin plated
IDC Housing	ABS+PC, UL94V0
PCB	FR4 94V0
Rear Cable Management	Al-Mg alloy, T= 1.5mm, Anodized

Performance

Item	Description
Wiring	TIA 568 A/B
IDC Type	110
Insertion Force	<=30N
Plug Insertion Life	800 times insertion (RJ45, RJ11/RJ12)
Wire Size Capability	22 ~ 26 AWG solid wire

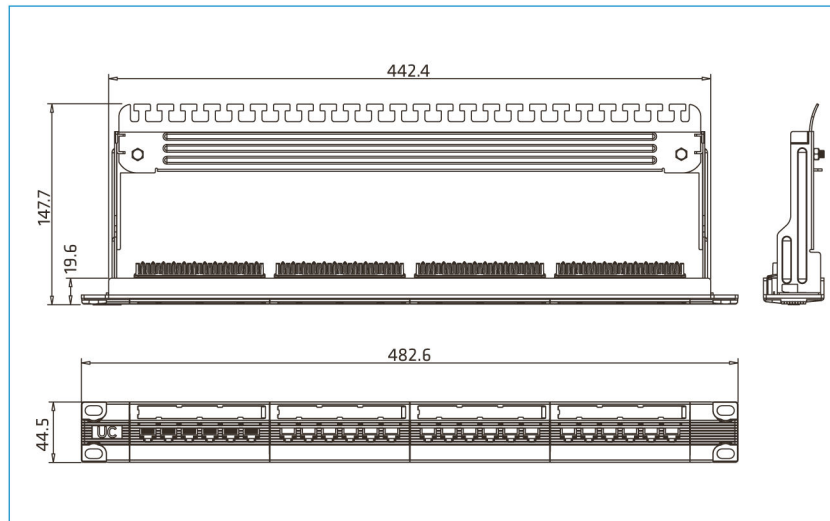

- Category 6 hardware compliant performance.
- “Write on” description label protected by clear plastic holder for clear port marking and identification.
- Supplied with rear cable management to ensure proper cable bending radius.
- Al-Mg alloy made panel and cable management reduces 50% of the weight.
- Foldable rear cable management ideal for minimizing packaging size.
- Optional color-coded dust cover available for port protection.
- Component level tested.

Ordering Information

SAP IC	UC P/N	UC Material Code	Product Description	P.U
YPWBP00342	PWU9747	UC C400 PW TR U BK 24 1U V1	19" 1U 24P UTP Punchdown Panel, RJ45, Cat.6,180°	1pc/box