

UC C500 PPC S 24 1U


19" 1U 24P, Shielded, With Empty Cassettes, Cat 5e/6/6A, 180°

Specification

| Item | Description |
|------------------------|------------------------------------|
| Panel | SPCC, T=1.8mm, black coated |
| Front Cover | ABS+PC, UL94V0 |
| RJ45 Housing | PBT + 15% GF 94V0 |
| Contacts and IDC | Phosphor bronze |
| Contact Surface Finish | 50u" gold plated over contact area |
| IDC Surface Finish | Tin plated |
| IDC Housing | PC, UL94V0 |
| PCB | FR4 94V0 |
| Rear Cable Management | SPCC, black coated |



- 1U 24-port high density empty panel provides optimum using of rack
- Supports both unshielded & shielded cabling
- Cassette design for pre-termination
- Plug & Play at Job Site

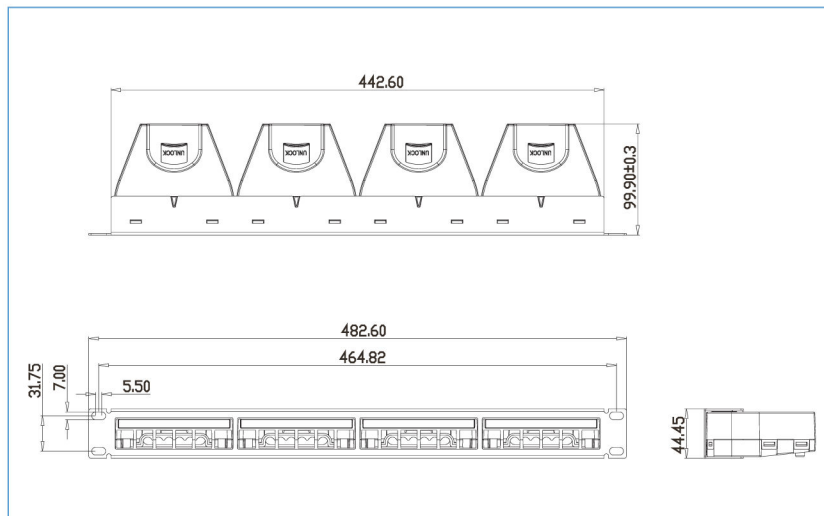

Ordering Information

| SAP IC | UC P/N | UC Material Code | Product Description | P.U |
|--------|---------|---------------------|--|---------|
| TBA | PPS9000 | UC C500 PPC S 24 1U | 19" 1U 24P, 4 X Cassettes, Cat.5e / 6 / 6a, 180° | 1pc/box |