


# UC C500 PP HP S 24 V2


19" 1/2U, High Density, 24P, Empty, Cat 6A, 180°

## Specification

Item	Description
Panel	SPCC, T=1.8mm, black coated
Front Cover	ABS+PC, UL94V0
RJ45 Housing	PBT + 15% GF 94V0
Contacts and IDC	Phosphor bronze
Contact Surface Finish	50u" gold plated over contact area
IDC Surface Finish	Tin plated
IDC Housing	PC, UL94V0
PCB	FR4 94V0
Rear Cable Management	SPCC, black coated

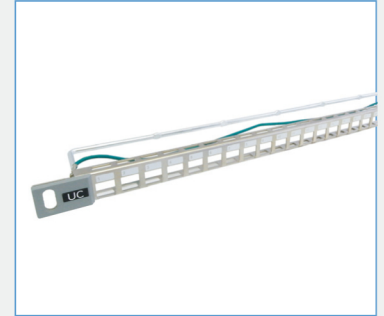

- High density design, reducing the rack space consumption
- Supports both unshielded & shielded cabling
- With rear cable management support
- Used with High Density Keystone Jack UC P/N MJTF1000

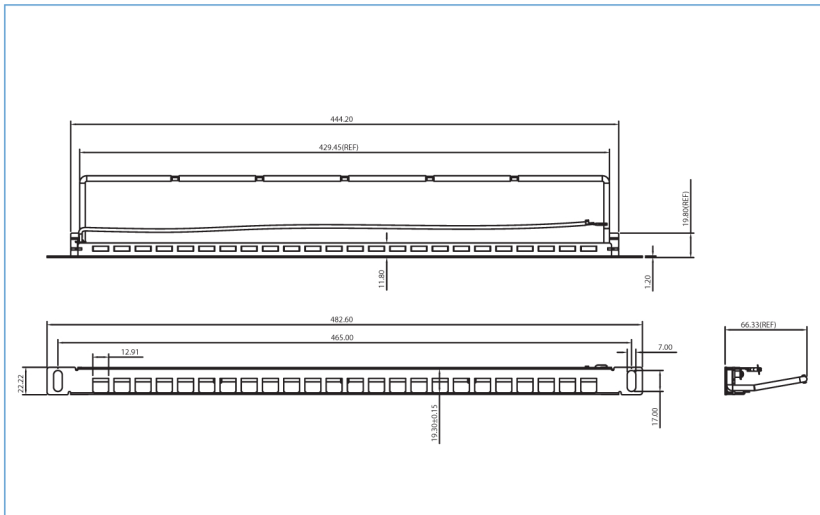

## Ordering Information

SAP IC	UC P/N	UC Material Code	Product Description	P.U
TBA	PPS0500	UC C500 PP HP S 24 V2	19" 1/2U, High Density, 24P, Empty, Cat 6a, 180°	1pc/box