

DS-7332HGHI-SH


TurboHD DVR



Key Features

- Dual Stream H.264 Compression
- HD-TVI/Analog/Network Camera Tribrid
- Auto-Detect/Configure HD-TVI/Analog Input
- Full Channel @ 1080p Resolution Non Real-Time Recording
- HDMI and VGA Output at Up to 1920 × 1080p Resolution
- High Resolution Over Coax Cable
- Supports Up to 16-ch Synchronous Playback at 1080p Resolution

Rear Panel of DS-7332HGHI-SH

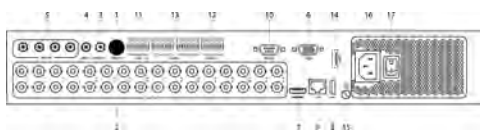

- 1 **Not Used**
- 2 **Video In**
- 3 **CVBS Audio Out**
VGA Audio Out
- 4 **Line In**
- 5 **Audio In**
- 6 **VGA**
- 7 **HDMI**
- 8 **USB Interface**
- 9 **LAN Interface**
- 10 **RS-232**
- 11 **RS-485 Interface**
KB
- 12 **Alarm Out**
- 13 **Alarm In**
- 14 **eSATA**
- 15 **Gnd**
- 16 **100 to 240 VAC**
- 17 **Power Switch**

Order Models

DS-7332HGHI-SH

DS-7332HGHI-SH	
Video/Audio Input	
Video Compression	H.264
Analog and HD-TVI Video Input	32-ch BNC interface (1.0 Vp-p, 75 Ω)
Supported Camera Types	720p25, 720p30, 720p50, 720p60, CVBS
IP Video Input	8-ch (up to 32-ch) Up to 2 MP resolution
Audio Compression	G.711u
Audio Input	4-ch, RCA (2.0 Vp-p, 1 K Ω)
Two-Way Audio In	1-ch, RCA (2.0 Vp-p, 1 K Ω)
Video/Audio Output	
HDMI/VGA Output	1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
Encoding Resolution	Main stream: 1080p (non-real-time)/720p/VGA/4CIF/CIF Sub-stream: WD1 (non-real-time)/4CIF (non-real-time)/CIF/QCIF/QVGA
Frame Rate	Main stream: 30 fps (maximum) Sub-stream: 30 fps (maximum)
Video Bit Rate	32 Kbps to 6 Mbps
Audio Output	2-ch, RCA (linear, 1 K Ω, for VGA output and CVBS output respectively)
Audio Bit Rate	64 Kbps
Dual-Stream	Supported
Stream Type	Video, video and audio
Synchronous Playback	16-ch
Playback Resolution	1080p/720p/VGA/WD1/4CIF/CIF/QVGA/QCIF
Network Management	
Remote Connections	128
Network Protocols	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTp, SNMP, NFS, iSCSI, UPnP™, HTTPS
Hard Disk	
Type	4 SATA interfaces for 4 HDDs; 1 eSATA interface
Capacity	Up to 6 TB capacity for each disk
External Interface	
Network Interface	1; 10M/100M/1000M self-adaptive Ethernet interface
Serial Interface	RS-232, RS-485, keyboard
Alarm In/Out	16/4
USB Port	3 × USB 2.0
General	
Power Supply	100 to 240 VAC, 47 to 63 Hz
Consumption (without hard disks)	≤ 65 W
Working Temperature	-10° C to +55° C (14° F to 131° F)
Working Humidity	10% to 90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimensions (w × d × h)	445 mm × 390 mm × 70 mm (17.5" × 15.3" × 2.7")
Weight (without hard disks)	≤ 5 Kg (11.0 lb)