

DS-KAD706Y-P Two Wire Distributor



- 2-wire IP distributor
- 6-port 2-wire cascade interfaces with device power supply, connecting with the door station or indoor station
- 2 cascade interfaces (In and Out) are designed for linking DS-KAD704Y/DS-KAD706Y/DS-KAD706Y-S series
- 8 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24 VDC input power supply


▪ **Specification**

General	
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Power supply	24 VDC
Power consumption	CH1 to CH5 < 6 W, CH6 < 16 W

▪ **Available Model**

DS-KAD706Y-P

▪ **Dimension**

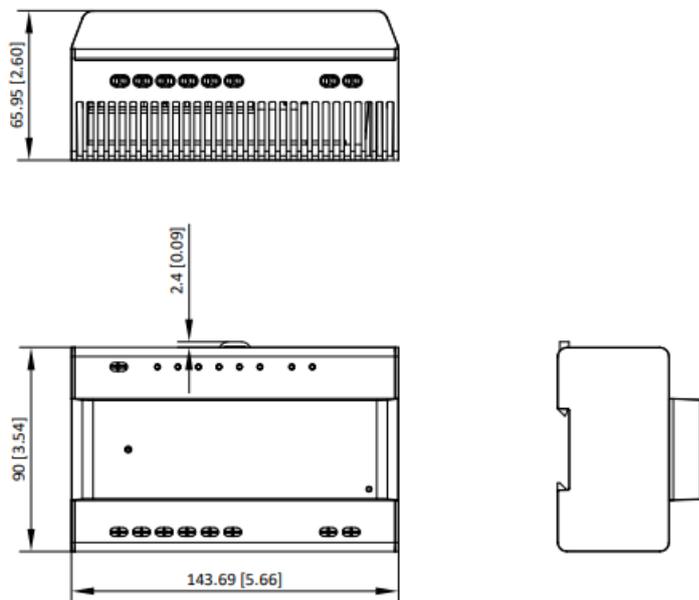

Unit:mm [inch]

SCALE 1:1

▪ **Accessory**

▪ **Optional**

DS-KD8003Y-IME2/ S Two wire main unit	DS-KAD706Y Two Wire Distributor	DS-KAD706Y-S Two Wire Distributor	DS-KD8003Y-IME2 Two wire main unit
			

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

