

# SMT-3232A

32" LED Monitor





## Key Features

- Support up to 1,920 x 1,080 resolution
- High contrast ratio 5000 : 1
- Fast response time 8ms
- HDMI, DVI, VGA, and Component (CVBS Common) video input
- Ethernet / RS-232C remote control
- Magicinfo player S3 : Local / Network contents player

## Dimensions

Unit : mm (inch)

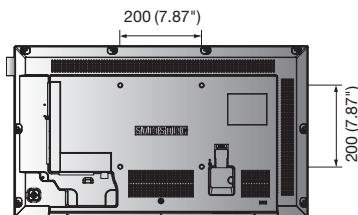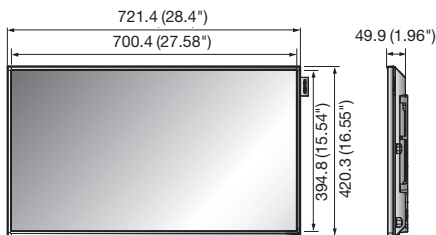

## SMT-3232A

DISPLAY		
Type		LED
Screen Size		32"
Max. Resolution		1,920 x 1,080
Brightness		350cd/m <sup>2</sup>
Contrast Ratio		5,000 : 1
Aspect Ratio		16 : 9
Viewing Angle (H/V)		178° / 178°
Display Color		16.7million
Response Time		8ms
Video System		NTSC / PAL
Panel Life		50,000hours
INTERFACE		
Video	Connector	VGA, DVI, HDMI, Component (CVBS common)
	Connector	Analogue D-sub (15 pin), DVI-D
	Input Signal	0.7Vpp ±5%
RGB / DVI	Available Format	640 x 480@60Hz/66Hz/72Hz/75Hz (VGA), 720 x 400@70Hz, 800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA), 832 x 624@75Hz, 1,024 x 768@60Hz/70Hz/75Hz (XGA), 1,152 x 864@75Hz, 1,280 x 720@60Hz, 1,280 x 800@60Hz, 1,280 x 1,024@60Hz/75Hz (SXGA), 1,366 x 768@60Hz, 1,440 x 900@60Hz, 1,600 x 900@60Hz, 1,680 x 1,050@60Hz, 1,920 x 1,080@60Hz
	Connector	HDMI
HDMI	Available Format	640 x 480p@60Hz, 720 x 480i@60Hz, 720 x 480p@60Hz, 720 x 576i@50Hz, 720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz, 1,920 x 1,080i@50Hz/60Hz, 1,920 x 1,080p@50Hz/60Hz
	Connector	Stereo mini jack
Audio	Speaker	10W x 1
	Multiple Display Control	RS-232C / RJ-45
Application Support		Remote controller
ON SCREEN DISPLAY		
Language		Chinese (Simplified), English, French, German, Italian, Korean, Polish, Portuguese, Russian, Spanish, Swedish
GENERAL		
Electrical	Input Voltage	100 ~ 240V AC (±10%) (50/60Hz)
	Power Consumption	Max. 77W
	Functions	VESA™ DPM compatible
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	10% ~ 80% (Non-condensing)
	Dimensions with Stand (WxHxD)	736.0 x 506.0 x 311.0mm (23.98" x 19.92" x 12.24")
Mechanical	Dimensions without Stand (WxHxD)	721.4 x 420.3 x 49.9mm (28.4" x 16.55" x 1.96")
	Bezel Size	Top 10.5mm (0.41") / Bottom 15.0mm (0.59")
	Weight	4.8Kg (10.58 lb)
Accessory	Cabinet Color	Black
	Wall Mounts	Optional
	VESA Mounts Interface	200 x 200mm
	BNC Input Cable (Gender)	Stereo to RCA & BNC cable
Foot Stand		SBM-3240ST (Optional)
FEATURE		
Internal Player (Embedded H/W)	Processor	Cortex-A9 1GHz Quad Core CPU
	Main Memory	1.5GB 48bit DDR3-933 (1866MHz)
	Storage (FDM)	8GB (2.65GB occupied by O/S, 5.35GB available)
	IO Ports	USB 2.0
Network Connection	Operating System	Linux
		Wi-Fi module embedded (Wi-Fi direct, Screen mirroring)

\* The latest product information / specification can be found at [www.samsungsecurity.com](http://www.samsungsecurity.com)

## Optional Accessory



Foot Stand SBM-3240ST